
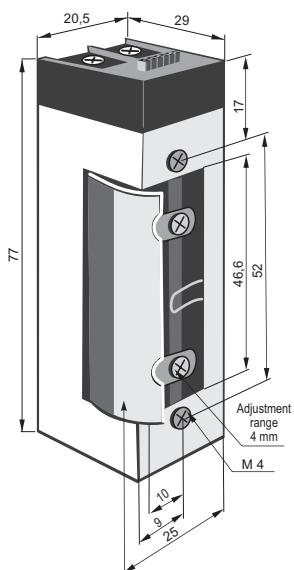


DUAL VOLTAGE



FEATURES

- ✓ Reversible (left and right hand).
- ✓ Height 77,5 mm., width 20,5 mm.
- ✓ For narrow profiles.
- ✓ Fail-safe (NO) models.
- ✓ Assembling screws distance 52 mm.
- ✓ Latch adjustment 4 mm.
- ✓ The power supply is set by jumper settings: 12 or 24 V DC.
- ✓ Low or very low power consumption.
- ✓ Durability: grade C-200 000 cycles.
- ✓ Category of use - grade 3 - suitable for public buildings.
- ✓ Certificate of Conformity acc. to EN 14846.

TECHNICAL DATA

Model	Standard	Rel.lever	Hold-Open	NO
1711 BI	<input checked="" type="checkbox"/>	-	-	<input checked="" type="checkbox"/>

Power supply (V)	12-24V DC
Tolerance (%)	± 5 %
Continuous work	100% 12V DC 100% 24V DC
Resistance (Ω)	45/180
Power consumption (mA)	12V / 260 24V / 130
Max preload DC (N)	10
Working temperature	12V DC = 58 °C 24V DC = 62 °C

Recommended front plates: 900; 901; 902; 903; 913