

MILAN S.r.l. a socio unico


**Head Office – Export department:**  
 Viale Europa, 74  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.4556-4158  
 F. +39 02 9039.4551  
 www.taskercables.com

**Ufficio Commerciale e Centro Distribuzione**  
 Viale Europa 72 Strada F12  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.0037-0059  
 F. +39 02 9039.0049  
 www.tasker.it

## Technical Datasheet

### tasker® TSK 1160 U.S.B. 2.0

### FirestoP® UL AWM STYLE 2725 Cable

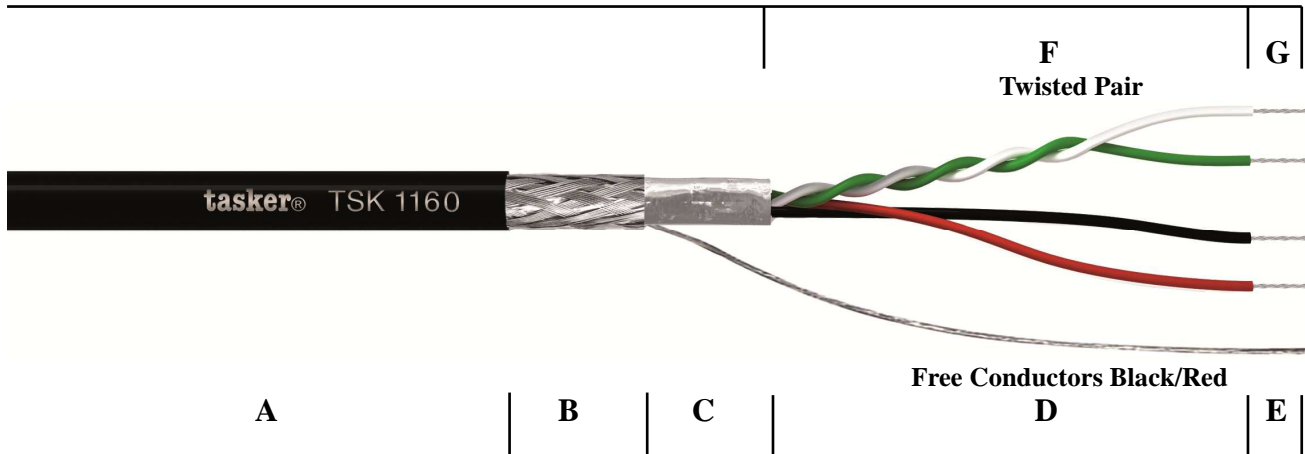

**CATEGORY** USB Cable (See Audio Catalogue)  
**APPLICATIONS** Data transmission and premade cables on USB2.0

- A:** Black Soft **Flame Retardant PVC** sheath.  
Outer Diam. Ø 5,20 (±0,20) mm.
- B:** First Shield in O.F.C. tinned copper Braid covering 90%  
+ Drain Wire in tinned copper (7x0,16 mm).
- C:** Second Shield in Aluminum/ Mylar tape covering 125%

**2x0,22 mm² Conductors:**

- D:** The two single conductors are isolated with PVC sheath and colored one black and red. Diam. Ø 1,05 (±0,10) mm.
- E:** Stranded O.F.C. tinned copper Formation 7x0,20 mm..  
Nom. Cross section 2x0,22 mm².

**1x2x0,14 mm² Stranded Pair:**

- F:** The twisted pair is isolated with HDPE sheath colored one White and one Green – Diam. Ø 1,05 (±0,10) mm.
- G:** Stranded O.F.C. tinned copper Formation 7x0,16 mm.  
Nom. Cross section 1x2x0,14 mm².

**MARKING** **tasker®** TSK1160 26 AWG – UL – AWM Style 2725 O.F.C. U.S.B. 2.0 Extra Flex Cable 80°C – 30V FirestoP® VW-1



MILAN S.r.l. a socio unico

**Head Office – Export department:**  
 Viale Europa, 74  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.4556-4158  
 F. +39 02 9039.4551  
 www.taskercables.com

**Ufficio Commerciale e Centro Distribuzione**  
 Viale Europa 72 Strada F12  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.0037-0059  
 F. +39 02 9039.0049  
 www.tasker.it

**CUSTOM PRODUCTION**

This product may be custom produced also in **L.S.Z.H.** polymer, **PE, PUR**, with or without Metallic Armor.

**Cable Properties**

<b>Standard</b>	USB 2.0
<b>UL Style</b>	2725
<b>Max Rated Voltage</b>	30 V
<b>Operative Temperature</b>	-20/+70°C

<b>USE</b>	<b>X</b>	Indoor	Interno Edificio	<b>INSTALLATION</b>	<b>X</b>	Fixed	Fissa	<b>INFORMATION</b>	<b>X</b>	RoHS2 Compliant
<b>Impiego</b>	<b>X</b>	Outdoor Limited	Esterno Limitato	<b>Posa</b>	<b>X</b>	Flexible Limited	Flessibilità limitata	<b>Informazioni</b>	<b>X</b>	Ver.B / 17.06.16
		Outdoor	Esterno			Dynamic (Drag Chain)	Mobile in Catena			
		Outdoor Direct Burial	Esterno Interrato			Dynamic (Torsion)	Mobile in Torsione			